



HOW TO SET UP A THURAYA XT PRO ON GAP

Add a Contact


Menu → Contacts → Add Contact

Name: Gap

E-mail:

- thurayaxtpro@devgap.globalalerting.com (for development / demo)
- thurayaxtpro@gap-us-1.globalalerting.com (for US production)
- thurayaxtpro@gap-au-1.globalalerting.com (for Australia production)

Save

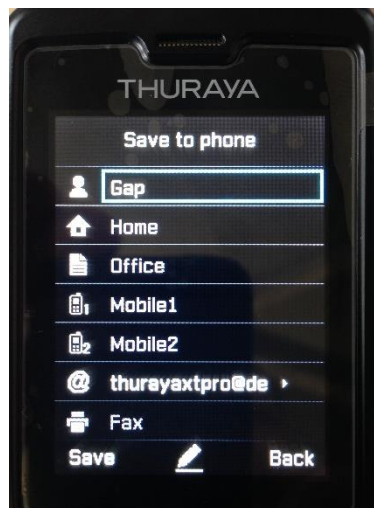

Set Up Tracking


Menu → Tracking

In the "Recipients" box select the "Gap" contact created above

Set your preferred message interval

In the "Output format" box select "DD.ddddd"

Save

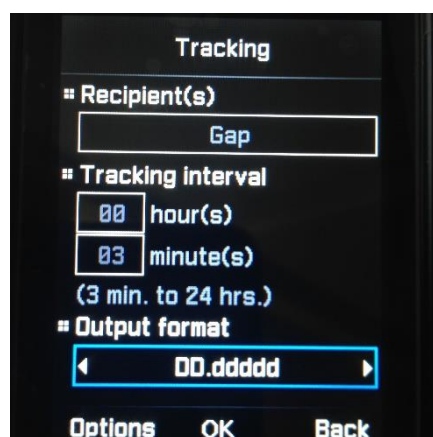

Set Up SOS


Menu → SOS

In the “Call recipient” box select the “Gap” contact

In the “Message recipient” box select the “Gap” contact

In the “SOS message (email)” box, enter the any text you like. This will be displayed in the GAP portal.

Save

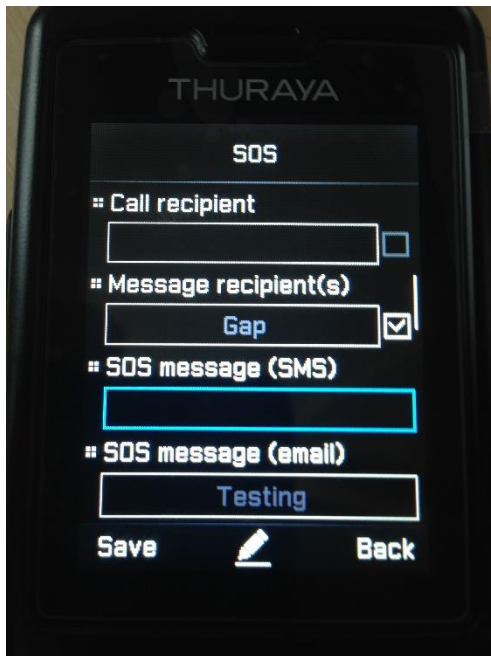

Portal

Add a new device using the phone IMEI (under the battery).

Edit the device and enter the phone number from the SIM card or service provider.

END